

# QIKPAC Connecting Shoe

QIKPAC connecting shoe allows you to create your own QIKPAC battery charging station or connection point. QIKPAC connecting shoe can be installed where required by creating a cut out in a suitable surface/panel and then simply clipping in place.

Once installed in the required location then connect our QF30 PSU to the connecting shoe via a GST08 lead for a convenient QIKPAC battery charging solution.

Alternatively use the QIKPAC connecting shoe to create a docking station for our QIKPAC, providing a DC solution to power furniture without a mains AC power connection.



## USPs

- Dual function QIKPAC docking solution
- 2 & 4 GST08 output connector versions
- Integral panel mount clips
- Install in horizontal or angled surfaces




# technical

QIKPAC connecting shoe is available in M2F and M4F versions.


- The M2F has one male and two female GST08 connector interfaces. When connected to a sub-surface mounted QF30 PSU it can act as a charging dock for a QIKPAC Battery or QIKPAC Carry unit. Alternatively power from a docked QIKPAC Carry unit can be used to Power USB outlets and wireless chargers fitted in furniture without an AC supply, or even a desk height adjustment motor, up to max load of 6A.

- The M4F has one male and four female GST08 connectors and should be specified when more than two DC outputs are required and/or the total load will be greater than 6A but not exceeds 12A.

## M2F (Charging Shoe)

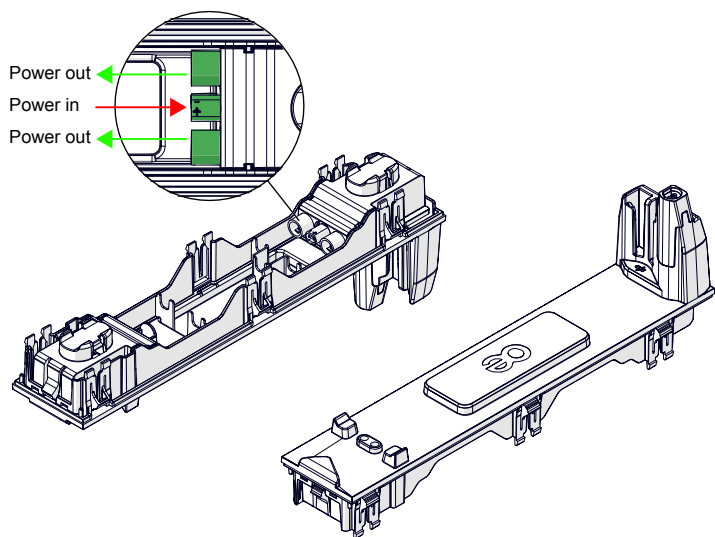

## M4F (Docking Shoe)- For use with sit/stand desks

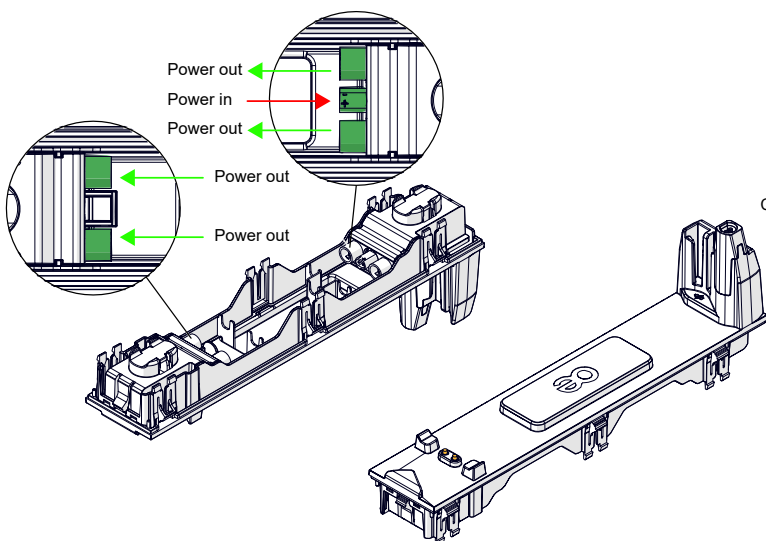

## Construction

High strength fire retardant polycarbonate

## Colours

Black or white

## Power cord options

GST08 male to female interconnect cable for connection to QF30 PSU

## QIKPAC battery compatibility

Single QIKPAC battery or QIKPAC Carry

## DC Power in Connector options

One male GST08 6A connector in base

## DC Power out Connector options

M2F – two female GST08 6A connectors in base – Max total output 6A

M4F – four female GST08 6A connectors in base – Max total output 12A

## Installation:

QIKPAC connecting shoe can be mounted into surfaces 1-3mm thick. Please see fitting instructions

## Quality & Testing


All QIKPAC connecting shoes are manufactured using ISO9001 quality controlled components and practices and are 100% tested before dispatch


## CE/UKCA Marking

QIKPAC connecting shoes are CE & UKCA marked by OE Electrics as complying with ROHS Directives 2011/65/EU and 2015/863/EU and equivalent UK regulations.


## Cable Retention

All QIKPAC connecting shoes have integrated cable retention clips as shown below in blue. Secure cables using cable tie feature.

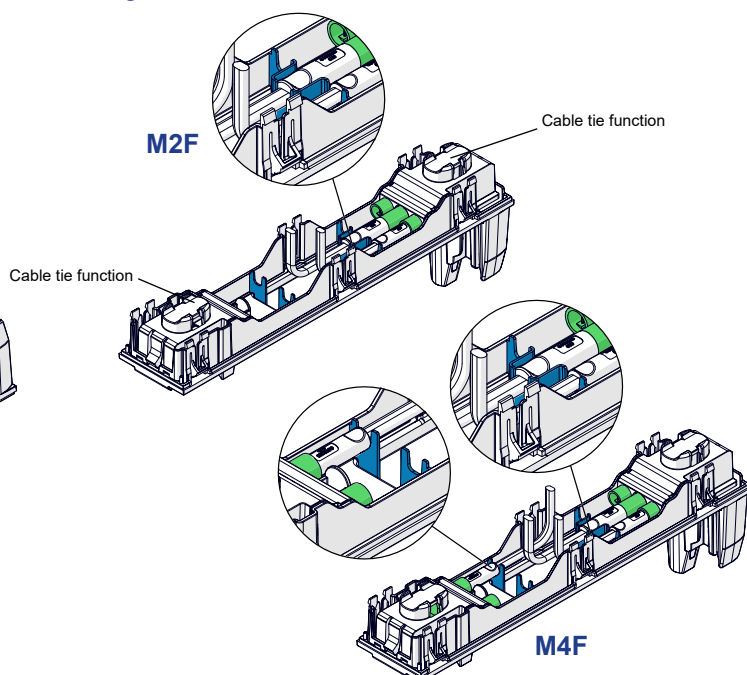


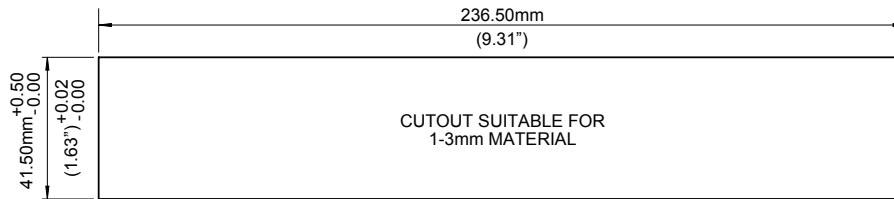

## Dimensions

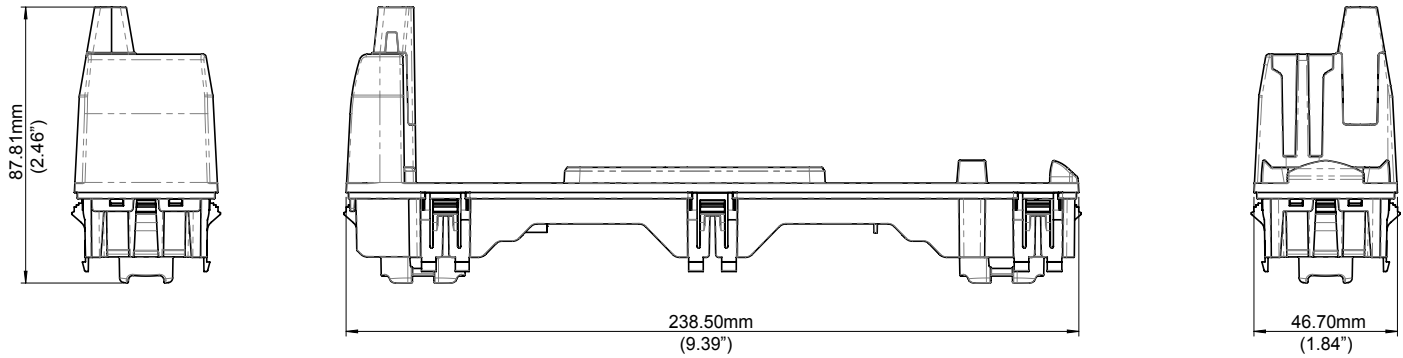

## Connecting shoe & QIKDOC

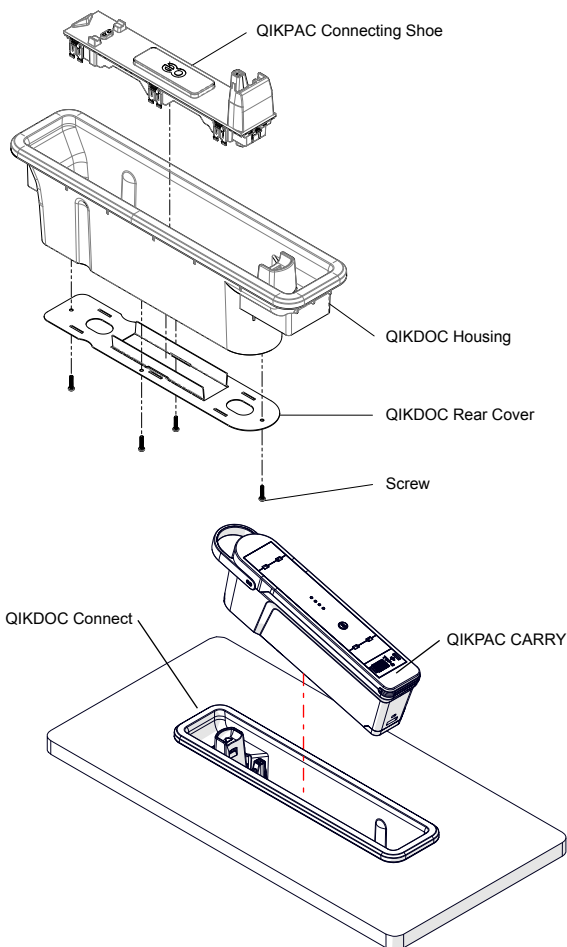

## Connecting shoe & charger base

