


iPower Lite Monitored Rack PDUs

Whole-PDU energy monitoring with optional environmental sensors and daisy chaining for compatible racks.

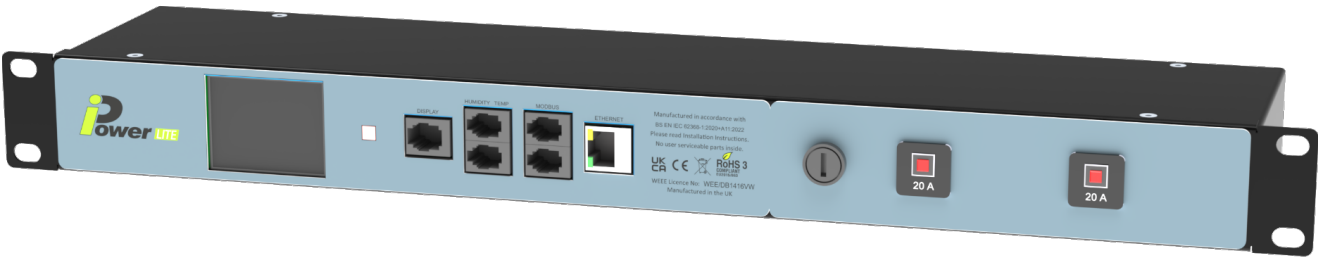

Example 32A horizontal unit shown. The supplied 3m Commando lead is omitted; other builds differ.

16A / 32A Commando inputs	3m Standard lead	5 years Manufacturer warranty	UK made Local manufacturing
-------------------------------------	----------------------------	---	---------------------------------------

Monitoring and connectivity

- Whole-PDU energy monitoring
 - HTTPS, SNMPv3 and email alerts
 - Up to 32 compatible devices per IP
- Local TFT display and remote access
 - Optional temperature/humidity sensors
 - 1U, 2U and slim vertical formats

Listed Lite IP1 models provide whole-PDU monitoring only. Optional per-outlet monitoring/switching builds cover up to 12 sockets. Sensors are sold separately.

Standard configurations

Product code	Format	Outlets	Input	Protection stated
IPL-001-IP1-3B	1U horizontal	10 C13 + 2 C19	16A	To final specification
IPL-001-IP1-3C	1U horizontal	10 C13 + 2 C19	32A	2 x 20A trips
IPL-002-IP1-3B	2U horizontal	12 C13 + 2 C19	16A	To final specification
IPL-002-IP1-3C	2U horizontal	12 C13 + 2 C19	32A	2 x 20A trips
IPL-003-IP1-3B	Slim vertical	12 C13 + 2 C19	16A	To final specification
IPL-003-IP1-3C	Slim vertical	12 C13 + 2 C19	32A	2 x 20A trips
IPL-004-IP1-3B	Slim vertical	24 C13 + 4 C19	16A	To final specification
IPL-004-IP1-3C	Slim vertical	24 C13 + 4 C19	32A	2 x 20A trips
IPL-005-IP1-3B	Slim vertical	36 C13 + 6 C19	16A	To final specification
IPL-005-IP1-3C	Slim vertical	36 C13 + 6 C19	32A	2 x 20A trips

Availability: Standard lead time 7-10 working days; allow 21 working days where new metalwork is required. Confirm stock, dimensions, mounting and final build when ordering.