


iPower REM Monitored Rack PDUs

Compact local and remote energy monitoring for server rooms, network racks and edge sites.

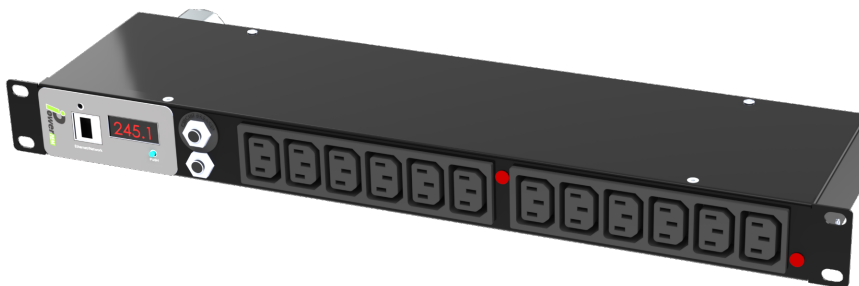

Example 32A horizontal unit shown. The supplied 3m Commando lead is omitted; other builds differ.

16A / 32A

Commando inputs

3m

Standard lead

5 years

Manufacturer warranty

UK made

Local manufacturing

Monitoring and connectivity

- Whole-PDU energy monitoring
- Web GUI, SNMP and email alerts
- Internal temperature measurement
- Local display and network access
- Voltage, current, power and energy
- 1U horizontal and vertical formats

Standard models provide whole-PDU monitoring only. Individual outlet control requires a separately specified configuration.

Standard configurations

Product code	Format	Outlets	Input	Protection stated
IPR-524-3B	1U horizontal	12 C13	16A	To final specification
IPR-524-3C	1U horizontal	12 C13	32A	2 x 16A trips
IPR-526B-3B	Vertical	12 C13 + 4 C19	16A	To final specification
IPR-526B-3C	Vertical	12 C13 + 4 C19	32A	2 x 16A trips; status neons
IPR-527B-3B	Vertical	20 C13 + 4 C19	16A	To final specification
IPR-527B-3C	Vertical	20 C13 + 4 C19	32A	2 x 16A trips

Availability: Standard lead time 7-10 working days; allow 21 working days where new metalwork is required. Confirm stock, dimensions, mounting and final build when ordering.