


ICON Desktop Units

ICON ONE, TWO & FOUR | Standard and 65W USB charging

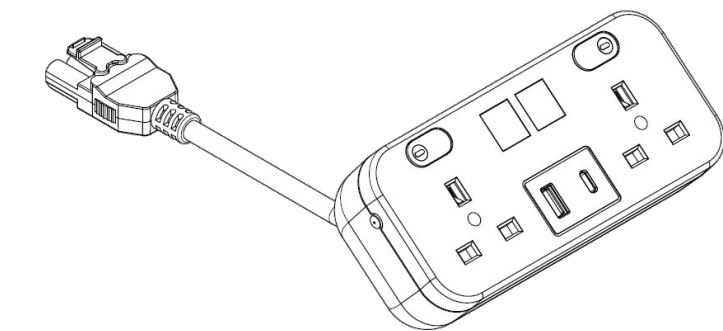

KEY FEATURES

- 1, 2 or 4 UK sockets
- Black or white finish
- Standard and 65W USB options
- Resettable thermal fuses
- Desk clamp included

Desktop power modules in black or white, with 1, 2 or 4 UK sockets. ICON ONE includes two USB-C ports and one USB-A port. ICON TWO and FOUR offer A+C or dual USB-C charging, plus two configurable media slots.

ICON ONE models

Part code	USB ports / rating	Colour
ICON-ONE.W	2 x USB-C + 1 x USB-A / 18W	White
ICON-ONE.B	2 x USB-C + 1 x USB-A / 18W	Black
ICON-ONE.W-65	2 x USB-C + 1 x USB-A / 65W	White
ICON-ONE.B-65	2 x USB-C + 1 x USB-A / 65W	Black

Installation & care

A tool-less desk clamp is included and fits desktops 20-35mm thick. Fit the clamp into the integrated mounting hole at the rear. Do not use with products or appliances exceeding 5A. Reset a thermal fuse by using a tool to press the red reset button. Disconnect from the mains before wiping with a clean damp cloth.

ICON Desktop Units

ICON TWO models - 2 UK sockets

Part code	USB module	Media 1	Media 2	Colour
ICON.W	18W A+C	Blank	Blank	White
ICON.B	18W A+C	Blank	Blank	Black
ICON.W-65	65W C+C	Blank	Blank	White
ICON.B-65	65W C+C	Blank	Blank	Black
ICON.W-D1	18W A+C	Cat6	Blank	White
ICON.B-D1	18W A+C	Cat6	Blank	Black
ICON.W-65-D1	65W C+C	Cat6	Blank	White
ICON.B-65-D1	65W C+C	Cat6	Blank	Black
ICON.W-D2	18W A+C	Cat6	Cat6	White
ICON.B-D2	18W A+C	Cat6	Cat6	Black
ICON.W-65-D2	65W C+C	Cat6	Cat6	White
ICON.B-65-D2	65W C+C	Cat6	Cat6	Black
ICON.W-DH	18W A+C	Cat6	HDMI	White
ICON.B-DH	18W A+C	Cat6	HDMI	Black
ICON.W-65-DH	65W C+C	Cat6	HDMI	White
ICON.B-65-DH	65W C+C	Cat6	HDMI	Black

Media & charging options

18W A+C: 1 x USB-A and 1 x USB-C. 65W C+C: 2 x USB-C. Other configurations are available, including Cat6, Cat6A, HDMI, USB-A and USB-C media modules. USB media couplers are separate from the charging ports.

ICON Desktop Units

ICON FOUR models - 4 UK sockets

Part code	USB module	Media 1	Media 2	Colour
ICON.W4	18W A+C	Blank	Blank	White
ICON.B4	18W A+C	Blank	Blank	Black
ICON.W4-65	65W C+C	Blank	Blank	White
ICON.B4-65	65W C+C	Blank	Blank	Black
ICON.W4-D1	18W A+C	Cat6	Blank	White
ICON.B4-D1	18W A+C	Cat6	Blank	Black
ICON.W4-65-D1	65W C+C	Cat6	Blank	White
ICON.B4-65-D1	65W C+C	Cat6	Blank	Black
ICON.W4-D2	18W A+C	Cat6	Cat6	White
ICON.B4-D2	18W A+C	Cat6	Cat6	Black
ICON.W4-65-D2	65W C+C	Cat6	Cat6	White
ICON.B4-65-D2	65W C+C	Cat6	Cat6	Black
ICON.W4-DH	18W A+C	Cat6	HDMI	White
ICON.B4-DH	18W A+C	Cat6	HDMI	Black
ICON.W4-65-DH	65W C+C	Cat6	HDMI	White
ICON.B4-65-DH	65W C+C	Cat6	HDMI	Black

Media & charging options

18W A+C: 1 x USB-A and 1 x USB-C. 65W C+C: 2 x USB-C. Other configurations are available, including Cat6, Cat6A, HDMI, USB-A and USB-C media modules. USB media couplers are separate from the charging ports.

ICON Desktop Units

65W USB charging - single-port operation

Port	Output profiles	Maximum
USB-C1	5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A	65W
USB-C2	5V/3A; 9V/2.22A; 12V/1.67A	20W
USB-A (ONE only)	5V/3A; 9V/2A; 12V/1.5A	18W

Applicable 65W models

ICON-ONE.B-65 / ICON-ONE.W-65; ICON.B-65 / ICON.W-65; ICON.B4-65 / ICON.W4-65. USB charger input: 220-240Vac, 50/60Hz, 1.8A maximum.

65W USB charging - multiple ports in use

Ports used	Output allocation
USB-C1 + USB-C2 (all 65W models)	USB-C1: 45W maximum; USB-C2: 20W maximum.
USB-C1 + USB-A (ICON ONE)	USB-C1: 45W maximum; USB-A: 18W maximum.
USB-C2 + USB-A (ICON ONE)	5V/3A, 15W maximum shared.

Multi-port voltage / current profiles

Port	Output profiles
USB-C1 at 45W	5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/2.25A
USB-C2 at 20W	5V/3A; 9V/2.22A; 12V/1.67A
USB-A at 18W	5V/3A; 9V/2A; 12V/1.5A

Output allocation

65W is the maximum single-port output from USB-C1. With both USB-C ports in use, power is allocated as 45W + 20W. The source does not specify ICON ONE output with all three ports used simultaneously.

ICON Desktop Units

Standard USB modules

Module / models	Single-port output	Multiple ports
ICON ONE standard ICON-ONE.B / .W	Each USB-C: 5V/3A, 9V/2.2A, 12V/1.67A; 20W. USB-A: 5V/3A, 9V/2A, 12V/1.5A; 18W.	USB-C1 + C2 + USB-A: 5V/3.1A max.
ICON TWO / FOUR 18W ICON.B / .W / .B4 / .W4	USB-C or USB-A: 5V/3A, 9V/2A, 12V/1.5A; 18W.	USB-C + USB-A: 5V/3.1A max.

Standard charger input

220-240Vac, 50/60Hz, 0.5A maximum.

Technical specification

Item	Specification
In the box	1 x ICON desktop unit; 1 x desk clamp
Dimensions	ONE: 74 x 76 x 100mm; TWO: 74 x 76 x 155mm; FOUR: 74 x 76 x 265mm
Housing / maximum voltage	PVC / 250V
Fuse	3A; resettable thermal fuse. 1.5-8A, 250V, 50/60Hz.
Mains lead	500mm; 1.5mm ² H05VV-F, 3 core
Mains connector	20A male 3-pole connector
Switch	Single pole with neon indicator
Standards / marks	BS 5733; BS 6396; RoHS; WEEE; CE; UKCA
Protection / flammability	UL940V; IP20.