LEVEL-C

IN desk power module

The ideal choice for power and data distribution in offices, meeting rooms, boardrooms, and amphitheaters, designed to promote effortless workspace productivity and comfort.

Level-C power modules may be specified with the full range of inter-changeable multimedia connections, fast chargers and country-specific AC power sockets compliant with the relevant international standards.

The modular parts may be black or white with a black, white or silver body.

FASCIAS & END CAPS

BODY

USP

- CERTIFIED WITH THE BSI KITEMARK KM 686563 (UK), IEC 60884-1:2002 + A1:2006 AND IEC 60884-2-7:2011 + A1:2013 (EUROPE)
- AVAILABLE WITH A CHOICE OF COUNTRY-SPECIFIC AC POWER SOCKETS
- AVAILABLE WITH 35W USB A+C CHARGER (PD & QC)
- AVAILABLE WITH THE INTERCHANGEABLE MULTIMEDIA PLATE (IMP) SYSTEM
- DUST PROTECTION WHEN THE PRODUCT IS COVERED
- THE LEVEL IS FLUSH TO THE SURFACE
- DESIGNED FOR DESK THICKNESS OF 10 MM MIN
- POSSIBILITY OF PANEL INSTALLATION 10-20 MM THICKNESS

AVAILABLE SOCKET TYPES:

E TYPE F TYPE G TYPE USB CHARGER

AVAILABLE MEDIA CONNECTIONS:

DATA USB HDMI VGA AUDIO

APPROVALS & CERTIFICATES:

sales@abl-ltd.com | UK & Ireland +44 (0) 1933 400 080 | EMEA Region +381 (0) 32 420 100

INSTALLATION

STEP 1. Place the module into the table cutout.
STEP 2. Make sure the module is placed straight and evenly spaced.
STEP 3. Use Allen Key slightly until the clamps touch the table desktop only.
STEP 4. Gently turn the Allen Key 180° clockwise on both sides of the power module.
STEP 5. Place provided covers on top of the power module sides.



STEP 1.

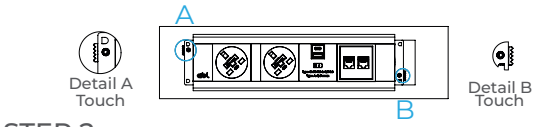

STEP 2.



STEP 3.



STEP 4.

STANDARD DIMENSIONS

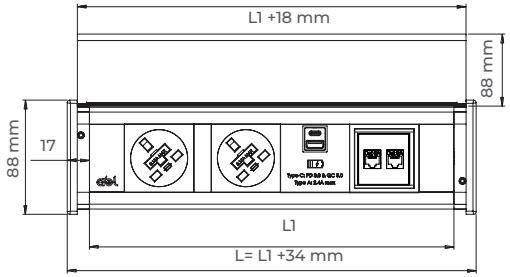

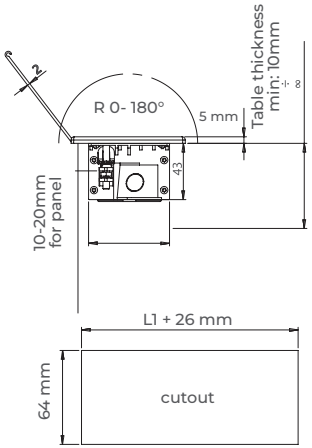

Legend:



Note: All sockets, except UK and Universal type, are manufactured without half blank plate (C). The module length depends on the required configuration and socket type.

A = 53,2 mm, B = 26,6 mm, C = 13,3 mm

TECHNICAL

Configuration:
Power / Multimedia / USB A+C chargers (PD & QC) / Combined
Power and Multimedia in combined units are separated internally

Earthing: Fully earthed

Fusing: (UK sockets only to enable compliance to BS6396) 5mm x 20mm ceramic fuses, with appropriate marking indicating the rating (3.15A/5A). All sockets feature integral, spare fuses patented by ABL. Choice of up to four sockets with 5A fuse, and up to six sockets with 3.15A to comply with BS6396.

Power cord: 0.5m standard lead with 3 Pole connector allows mains or connector leads to be changed to suit requirements, especially useful during moves and changes. Optionally available hardwired cable with appropriate national mains plugs.

Testing: 100% testing - continuity, polarity & earth
Testing of the USB A+C chargers: Output voltages, current, and power in all types of charging standards.

All Level power modules are fully manufactured in-house using ISO 9001:2015 quality-controlled practices.

Our power modules are tested in accredited laboratories of certification houses twice a year; while in-house quality control testing of each product is completed on every single power module before it leaves the factory.